

PRODUCT DESCRIPTION

Fastener with increased load capacity, used for hanging fixtures on steel cables. In addition, it can be used as a connection for one pole of electricity as the steel cable with Cu core can be conductive. Attached to the extrusion with a screw through a drilled hole. The power cable can be inserted into the fastener through the hole in the screw head.


Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	




TECHNICAL SPECIFICATION


TECHNICAL DRAWING

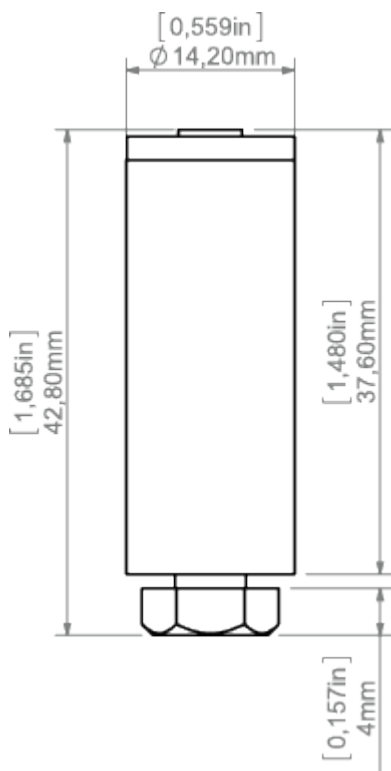


RELATED PROFILES



TEST-74 Profile
Ref: W4507



TETRA-78 Profile
Ref: W4508




TESPO Profile
Ref: 18020

RELATED PRODUCTS


ACCESSORIES



Isolated CU cable
FI-1.35 mm
Ref: 70310



Steel cable with
Cu FI 0.95 mm
core
Ref: 70240



Steel wire FI-1 1m
Ref: 1397