


PRODUCT DESCRIPTION

- Line of light
- Concealed aluminum elements

FINISH :

Non anodized (raw) 

Fill empty fields

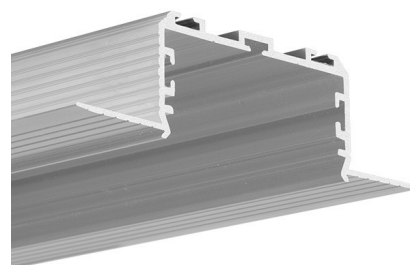

Product nr.	
Fixture type	
Company	
Job name	
Date	

TECHNICAL SPECIFICATION

Application

-for creating a line of light flush with the surface of walls and ceilings

Assembly

- fixed in the groove with mounting adhesive
- profile fastening wings covered with gypsum plaster
- The PROTECTIVE INSERT TECH-50 ensures that the profile slot remains wide enough for the snap-in cover (its use is NECESSARY during mounting and finishing works)


Additional information

- designed for up to four 10 mm wide LED strips
- line of light obtainable with the LIGER-50 cover and LED strips with a minimum of 120 LED/m
- the cover is evenly illuminated with four LED strips, with fewer strips shadows appear on the cover
- the KOZEL-50 profile is equipped with ZM sockets. ZM Connectors are used to connect profiles lengthwise. They are easily accessible even after mounting the profile in the ceiling
- the groove cut out in the drywall to accommodate the profile should be 51mm - 56mm wide
- when mounted in double drywall, the profile does not interfere with the structure

AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
C0757NA_1	Non anodized (raw)	1000 mm
C0757NA_2	Non anodized (raw)	2000 mm

Ref. nr.	surface finish	available lengths
C0757NA_3	Non anodized (raw)	3000 mm

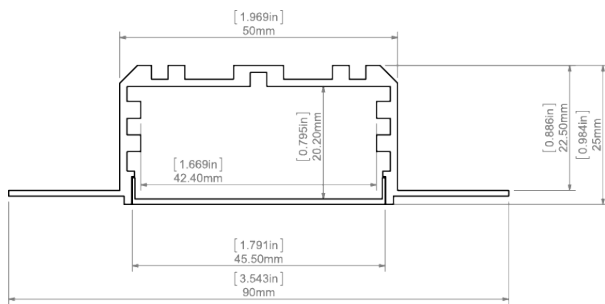TECHNICAL DRAWING

RELATED PRODUCTS

COVERS




Ref: 17086

END CAPS



Ref: 24280


ACCESSORIES




Ref: 17125



Ref: 00802



Ref: 42723



Ref: 42725



Ref: 42724



Ref: 42727




Ref: 42726


COUPLERS - CONNECTION METHODS FOR PROFILES




L135




L135PW




L135PZ



L90




L90PW




L90PZ




T135L



T135R



T90



X135



X90