
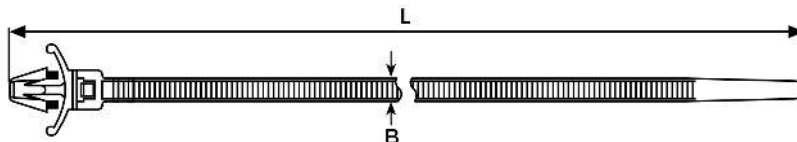


# VIAZACIA A UPEVNŔOVACIA TECHNIKA

## SŤAHOVACIE PÁSKY S RÝCHLOMONTÁŽNOU PRÍCHYTKOU / PUSH MOUNT TIES

- **materiál:** polyamid PA 6,6
- **teplotný rozsah:** - 40°C do + 85°C, max +110°C
- **teplota pri použití:** - 10°C do + 60°C
- **absorpcia vlhkosti:** 2,7%
- **horľavosť:** UL 94 V2

- **material:** polyamid PA 6,6
- **working temperature:** - 40°C to + 85°C, + 110°C for short time
- **tightening temperature:** - 10°C to + 60°C,
- **humidity absorption:** 2,7 %
- **flammability rating:** UL 94 V2

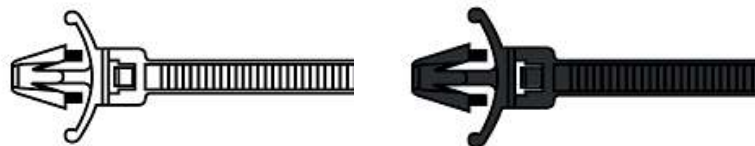

**RoHS PAHs Reach**

**HALOGEN FREE**

Objednáv. kód	Rozmer (mm)	Max. zaťaženie	Max. priemer zväzku (mm)	Hrúbka panelu (mm)	Balenie (ks)
SPRP 2110	110 x 2,5 / Ø4,8	80N	22,0	2,4	100
SPRP 4155	155 x 3,6 / Ø3,6	140N	36,9	2,4	100
SPRP 5100	100 x 4,8 / Ø6,4	230N	21,0	3,2	100
SPRP 5130	130 x 4,8 / Ø6,4		30,2	3,2	100
SPRP 5170	170 x 4,8 / Ø6,4		38,0	3,2	100
SPRP 5200	200 x 4,8 / Ø6,4		45,0	3,2	100